


STAR-4: Community WiFi Internet kit

STAR-4

Home installation kit for remote Internet

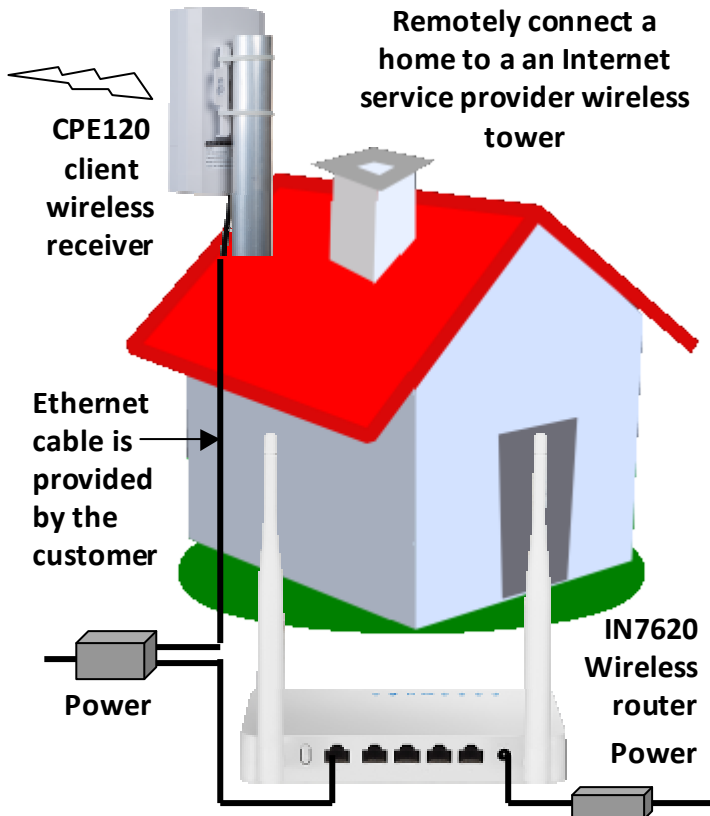

Two products in the STAR-4 kit



Kit Contents:

CPE120 client wireless receiver
Power over Ethernet power supply
IN7620 wireless router
Router power supply
Ethernet cables
Installation instructions

You provide the Starlink antenna for the Internet access, and use Guest Internet products to share the service with your community.

STAR-4 is a remote home Internet kit that can connect wirelessly to any STAR kit that has a central antenna.

- Share or sell an Internet service to a community using Guest Internet to manage the Starlink service.
- Everything you need in one kit to start providing a community Internet service using your Starlink antenna.
- Easy self-install and management of the Internet service, you do not depend on others.
- Full installation instructions included.
- Multi-language: English and Spanish.
- Print vouchers with access codes to give people access: duration, data speed and data limits.
- Monitor users of the Internet service.
- Monitor the service for failures: get alerts.
- Protection from abuse of the Internet service; prevents unauthorized Internet access.
- No other fees, maintenance, license, software, services or contracts.
- Free support, free upgrades.
- Free cloud service; manage the Internet from anywhere.
- Branding is easy to customize your Internet service.

The Internet service is not included with the kit.


Copyright (c) Guest Internet: Fire4 Systems Inc., 2005 to 2025. All Rights Reserved

For more information contact: support@guest-internet.com

STAR-4: Home Internet Kit Configuration

Introduction

The STAR series of kits are designed to share any Internet service (such as Starlink) with a community and provide wireless connections for homes up to 1 Km from the location of the central wireless antenna. The Internet service is connected to the Guest Internet controller and a powerful wireless access point connects to the Guest Internet controller. There are five STAR kits that can be connected to the Starlink antenna router, the STAR-1, -2, -6, -7 and -8. The difference between these kits is the performance and the number of people that can be connected. Each home that requires an Internet connection has a STAR-4 kit installed that communicates with the central wireless access point up to 1Km distant, with line of sight to the antenna.

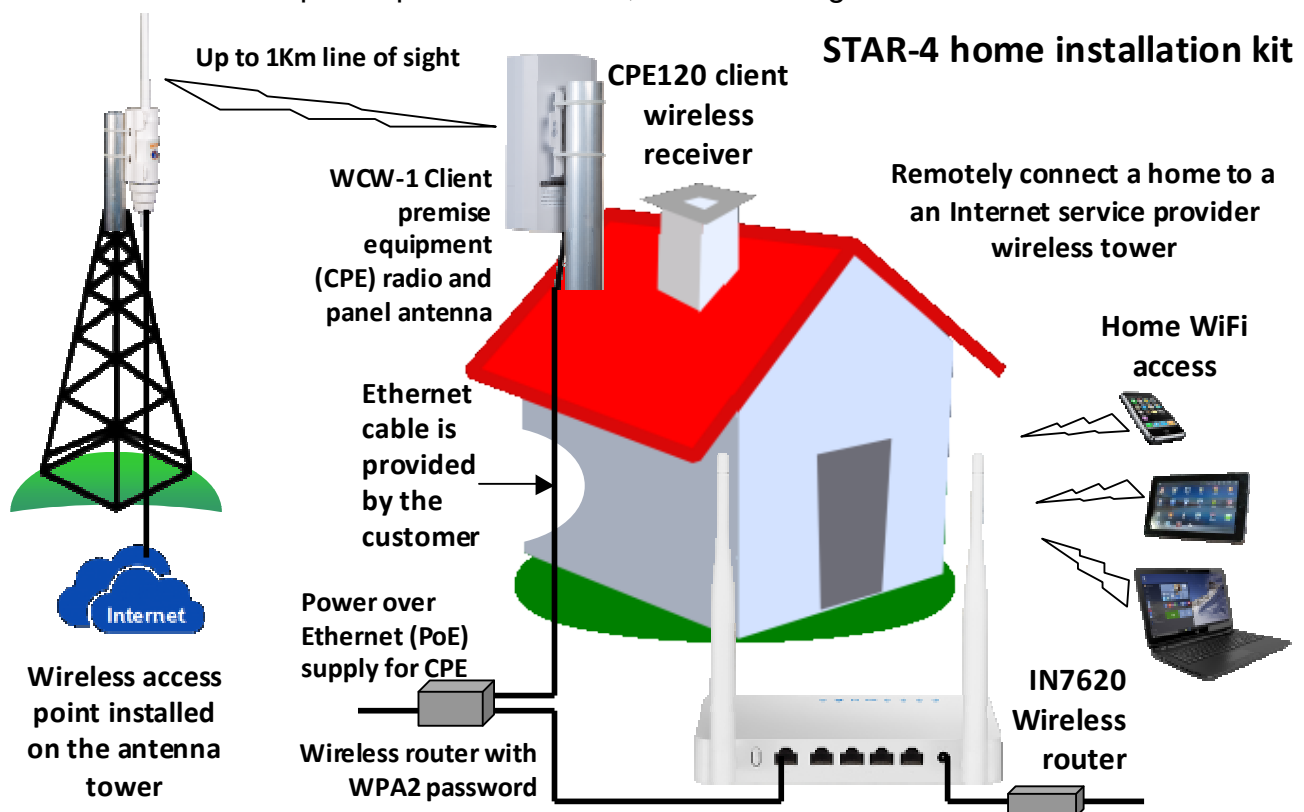


The pre-configured STAR-4 kit has two parts, the CPE120 wireless receiver that is installed on the home roof. This receiver must have a clear line of sight to the central wireless antenna. The CPE120 wireless receiver is connected to the IN7620 wireless router inside the home. The home residents connect WiFi devices to the IN7620 WiFi to get Internet access. The installer must provide the Ethernet cable that connects the CPE120 to the PoE power inside the home.

This document explains how to install and configure the STAR-4 kit.


Alignment of the CPE120 antenna

Each STAR-4 kit contains two wireless products, the CPE120 wireless 2.4GHz receiver and the IN7620 wireless router.

The CPE120 is a wireless antenna installed on the home roof that communicates with the STAR-1, 2, 6, 7 or 8 kits that is located at a central location. The CPE120 must have a clear line of sight to the STAR kit antenna. The CPE120 is connected to the IN7620 wireless router in the home that provides the WiFi Internet for the WiFi devices. The installer must provide the outdoor Ethernet cable that connects the CPE120 to the power over Ethernet supply inside the home.

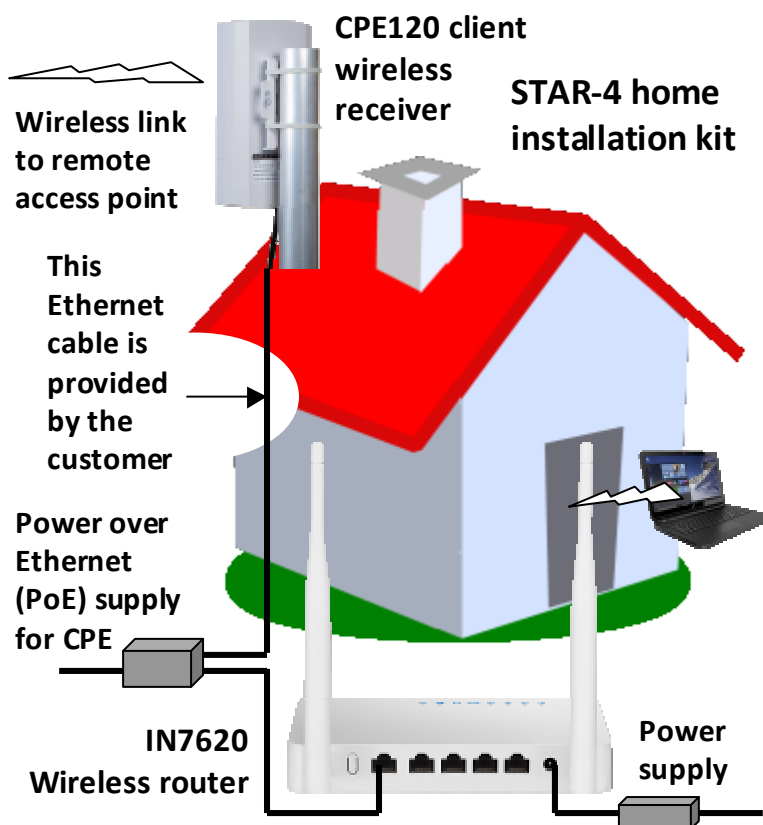

The CPE120 product is configured first. The antenna is directional and must point towards the STAR wireless access point antenna. The distance should be less than 1Km with line of sight. The direction of antenna transmission is shown in the figure.

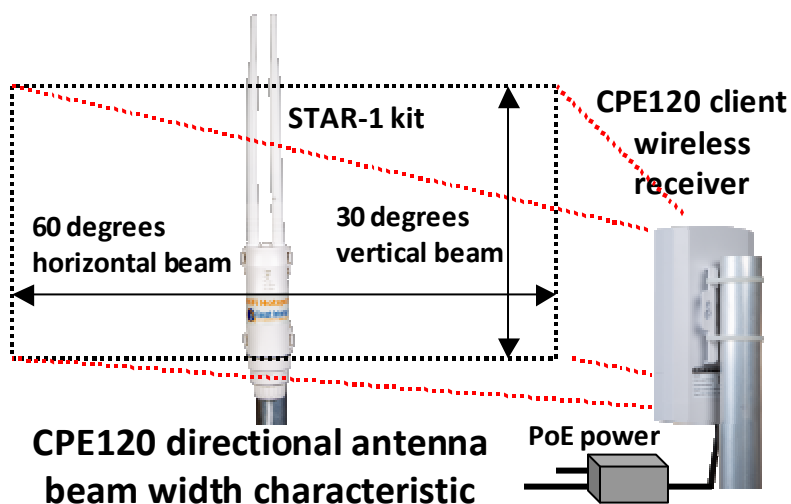

The STAR-4 kit products are already configured to extend the STAR-1, 2, 6, 7 and 8 kits to homes

Most installations of the STAR-4 kits with the STAR-1, 2, 6, 7 and 8 kits do not require configuration as the products are configured for the default settings. The installer can skip the configuration steps and proceed to the test steps.

When the STAR-4 kit will be used with any other manufacturers wireless access point product then the CPE120 will require configuration to connect to the wireless signal.


The STAR-4 kit CPE120 wireless receiver default configuration characteristics are as follows.

- The CPE120 wireless receiver connects to a wireless name (SSID) of: **Hot Spot**. The STAR-1, 2, 6, 7 and 8 kits are pre-configured to broadcast the SSID Hot Spot without encryption. If the configuration of the STAR-1, 2, 6, 7 or 8 kit SSID is changed then the CPE120 will also require configuring for the new SSID.

The STAR-4 kit IN7620 wireless router default configuration characteristics are as follows.

- The IN7620 broadcasts the SSID of: **3A773E**
- The IN7620 encryption key (WPA) is: **67676767**



If the installer wishes to change any parameter then the IN7620 must be configured. If there is no change then proceed to the test section.

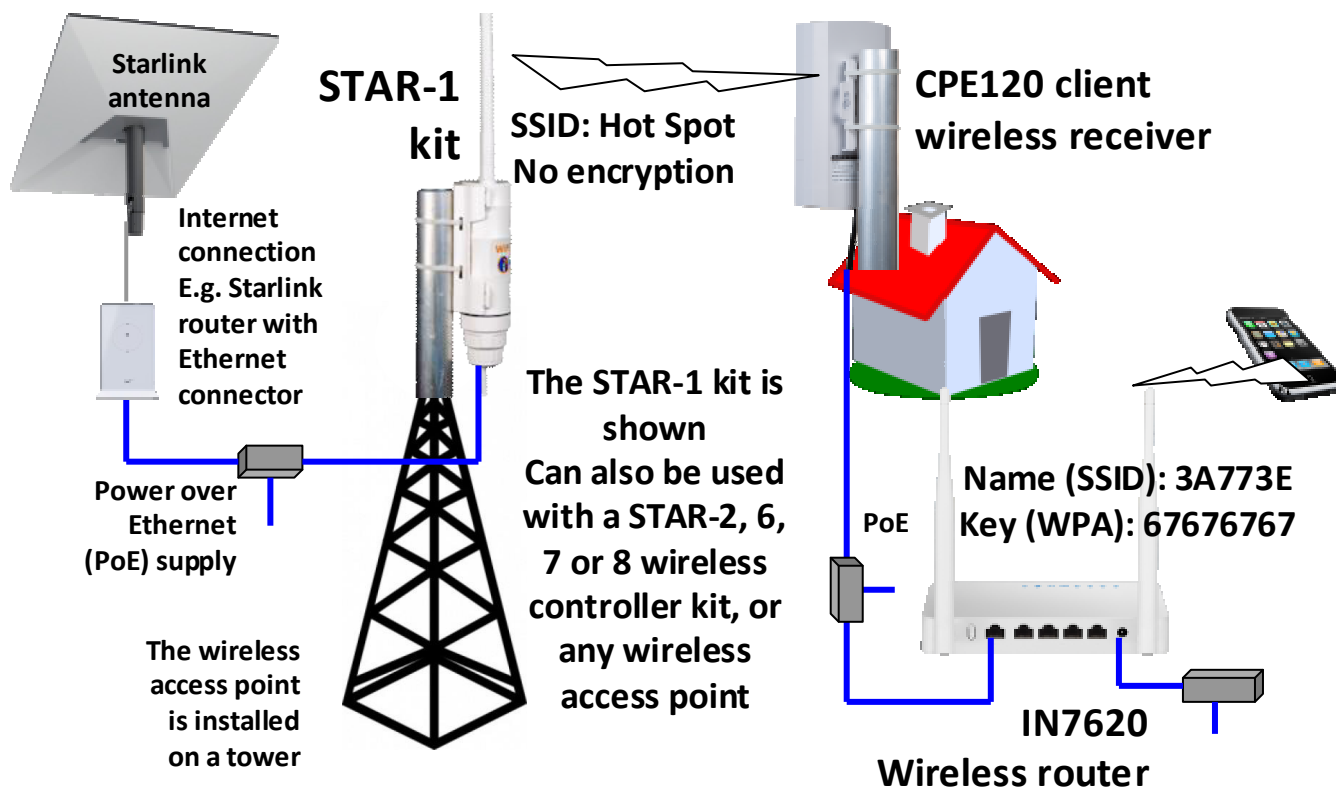

How to set a Windows computer to a static IP address


The CPE120 and IN7620 products are shipped pre-configured, however it may be necessary to configure them. To configure the CPE120 and IN7620 products it is necessary to set the computer LAN port for a static IP address.

Open the settings page, select network and Internet.

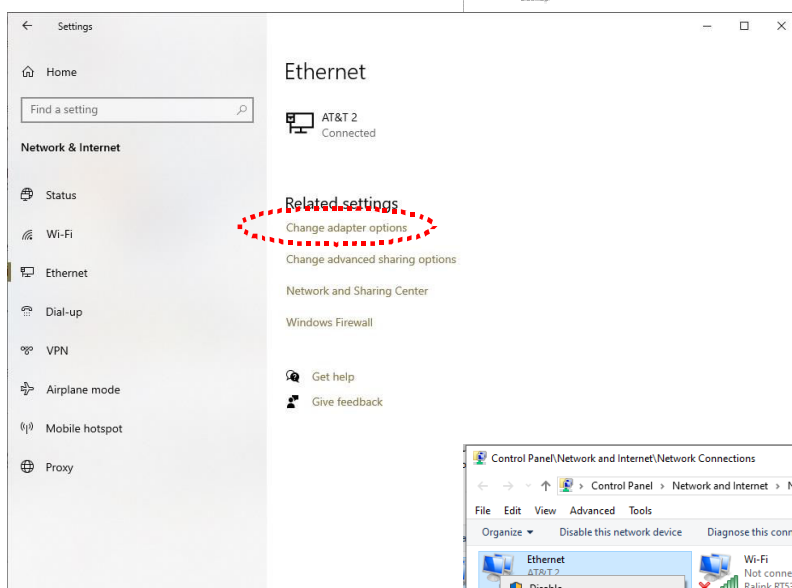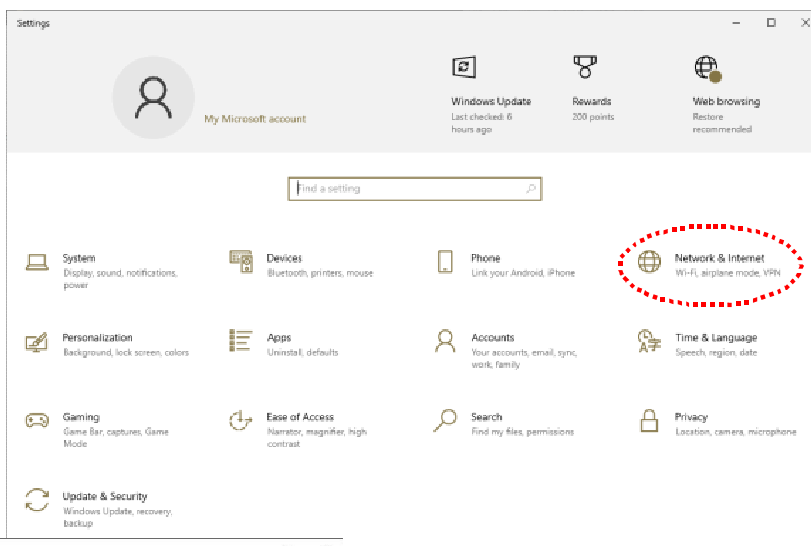


Select Ethernet then change adapter options.


Right click on Ethernet then select properties.

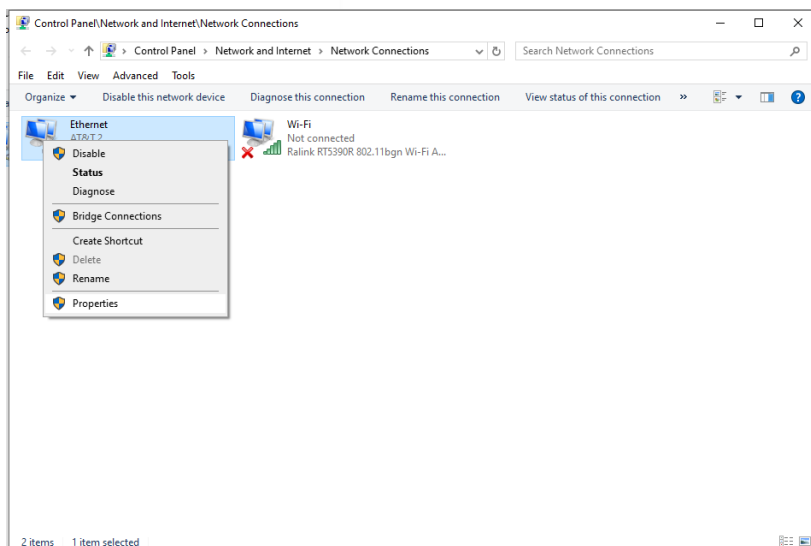


Select Internet protocol version 4 then click properties.

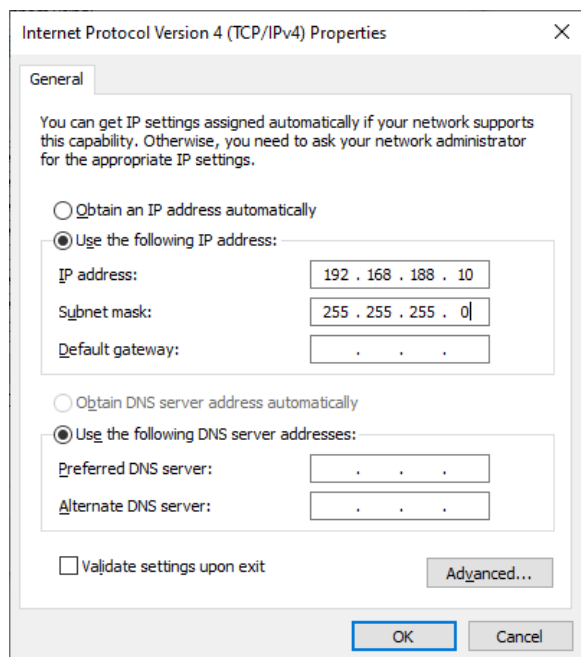

Finally click close. The LAN port can now be connected to the CPE120 and IN7620 products to configure them.

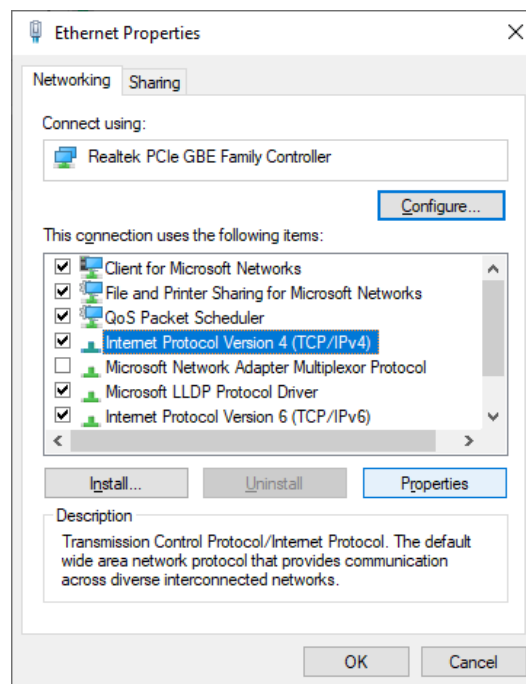

Select use the following IP address
Enter the IP address: **192.168.188.10**
Enter the subnet mask: 255.255.255.0
Click the OK button.

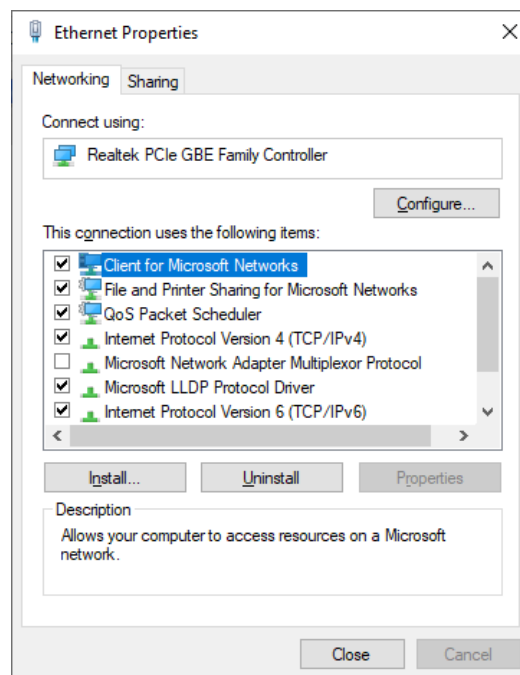

CPE120 Configuration

The CPE120 is pre-configured for use with the STAR-1, 2, 6, 7 or 8 kit.

To configure for use with other wireless access points, set the switch to 'C', (CLIENT), power the CPE120 via the PoE supply provided.


Install on the roof.

Point the CPE120 Client antenna to the central wireless access point antenna


Configure the computer to a static IP address: **192.168.188.10**. Open a new browser tab on the configuration computer. Type the following IP address in the browser tab then press enter.

192.168.188.100


A box will open for the **username** and **password**, the default password is '**admin**', enter the password and click login. The home page is displayed below.

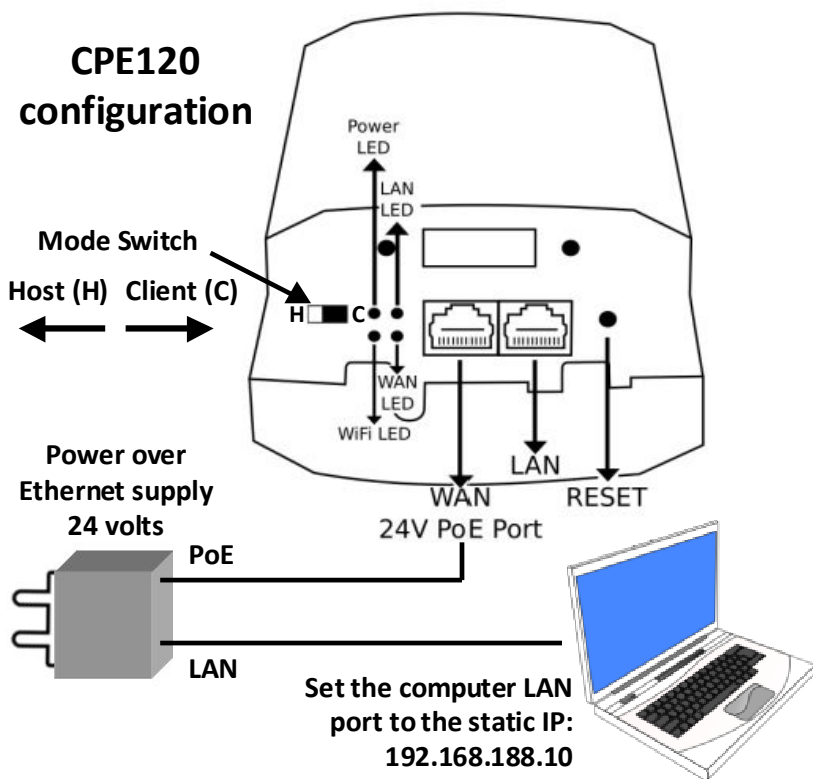

INTELLIGENT 300M Wireless Bridge

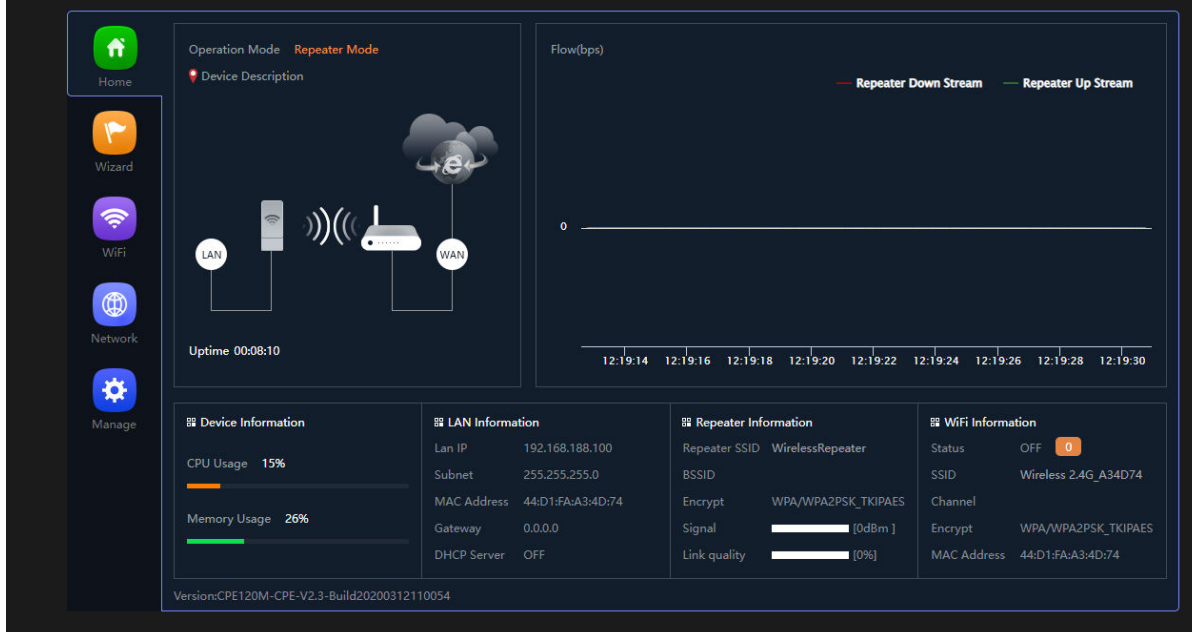


Click the **WiFi** page icon, the display is shown in the next figure.

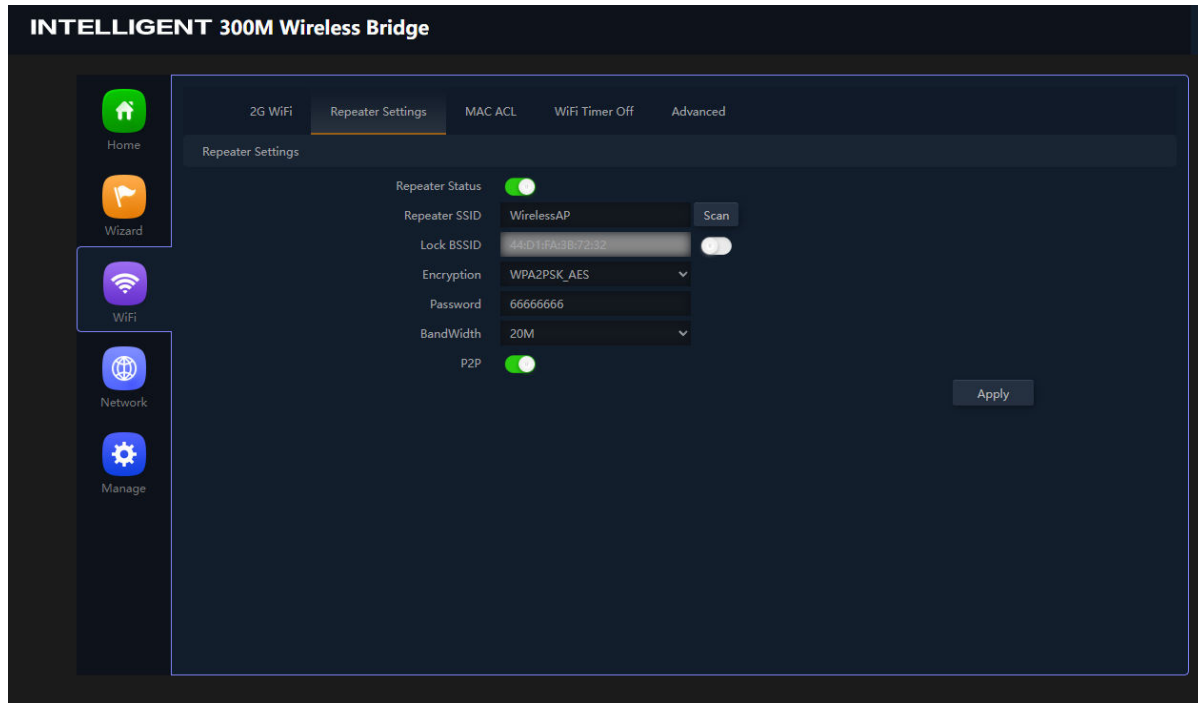


Click the tab **repeater settings**. Click the **scan** button, select the **SSID** of the STAR wireless access point from the list by clicking it. The default SSID is **Hot Spot**


Go to the password box, enter the **WPA** key that is configured in the Host. Click apply.

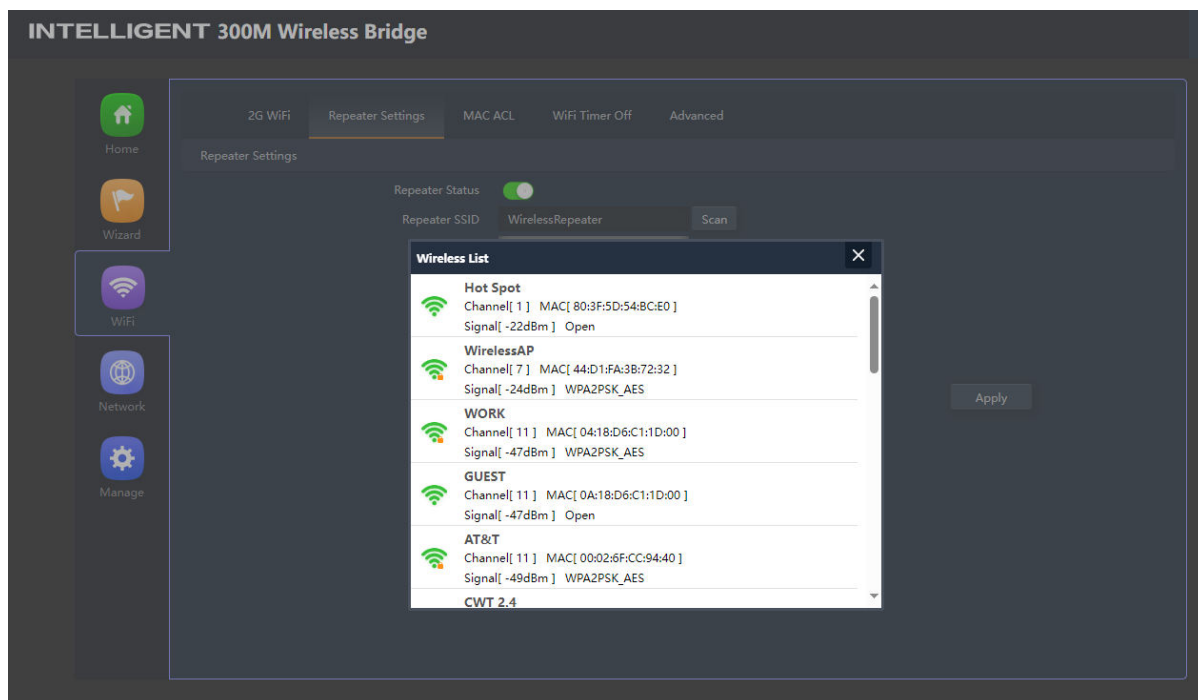

Continue with the WiFi page, click the **advanced** tab. Set the **country**. Click **apply**.

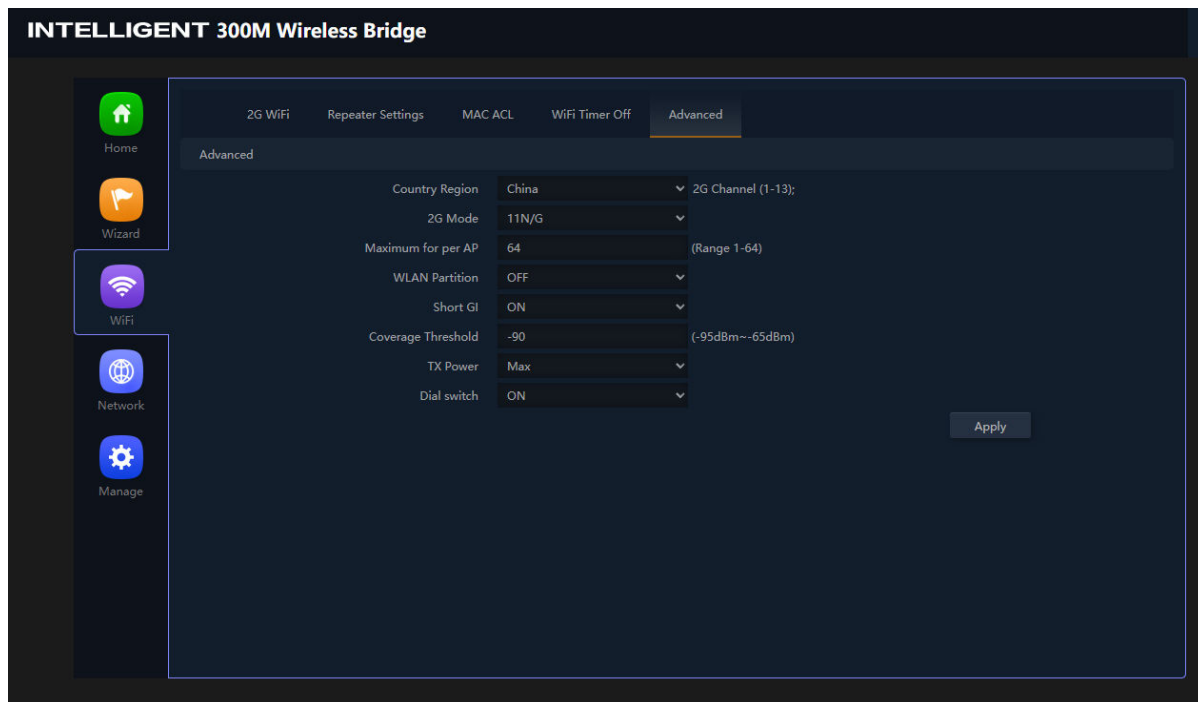

Click the manage icon, click the modify password tab. Enter the new **password**, make a note of the password. Click apply.

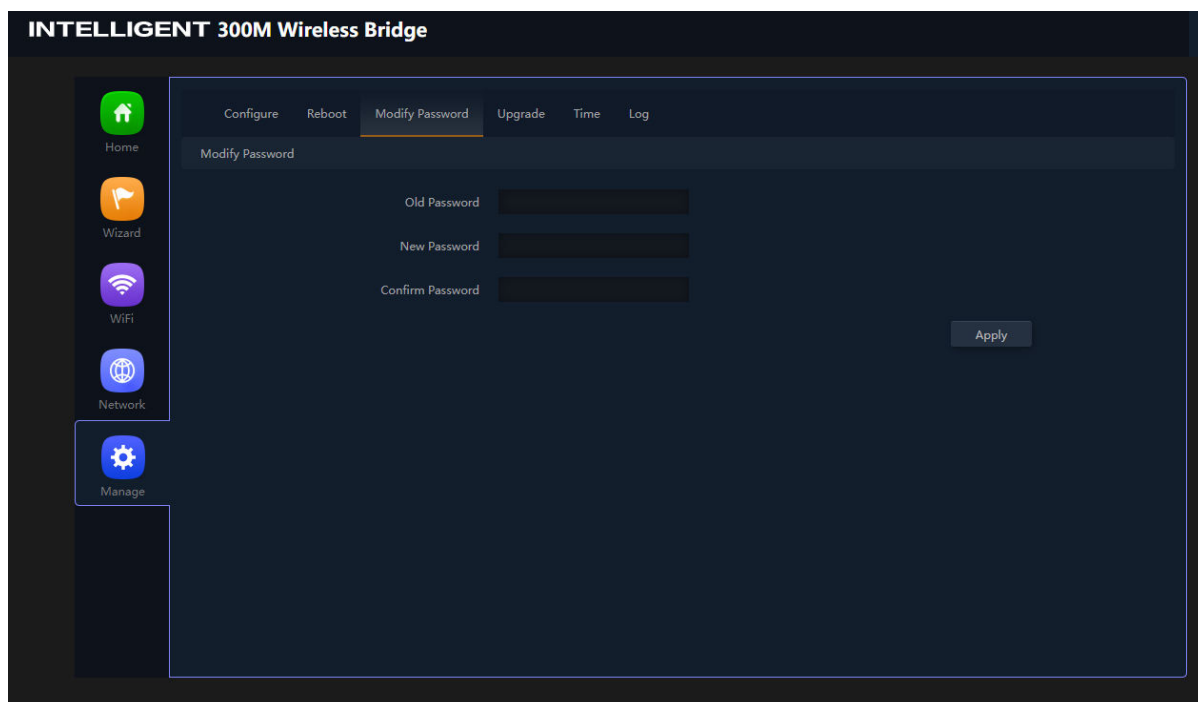

Configuration of CPE120 Client is complete.

Test the CPE120 connection to the central antenna: The wireless connection to the STAR-1, 2, 6, 7 or 8 kit


At this point the CPE120 antenna is installed on the home roof, and the configuration shows that the wireless is connected to the STAR wireless access point antenna. The next step is to test the Internet connection to the STAR wireless access point using a computer.

Set computer LAN port to DHCP using the instructions provided at the beginning of this document. Connect the computer LAN port as shown in the diagram.

Open a browser window then open a new tab and type: **aplogin.com**

The login page from the STAR-1, 2, 6, 7 or 8 kit should open, this is shown in the figure. If this page does not open then check the STAR-1, 2, 6, 7 or 8 WiFi connections using a mobile device to check that the login page opens. If it does then repeat the CPE120 configuration process to connect to: **Hot Spot**

Test the CPE120 connection to the STAR kit wireless access point.
See the STAR wireless access point login page
aplogin.com

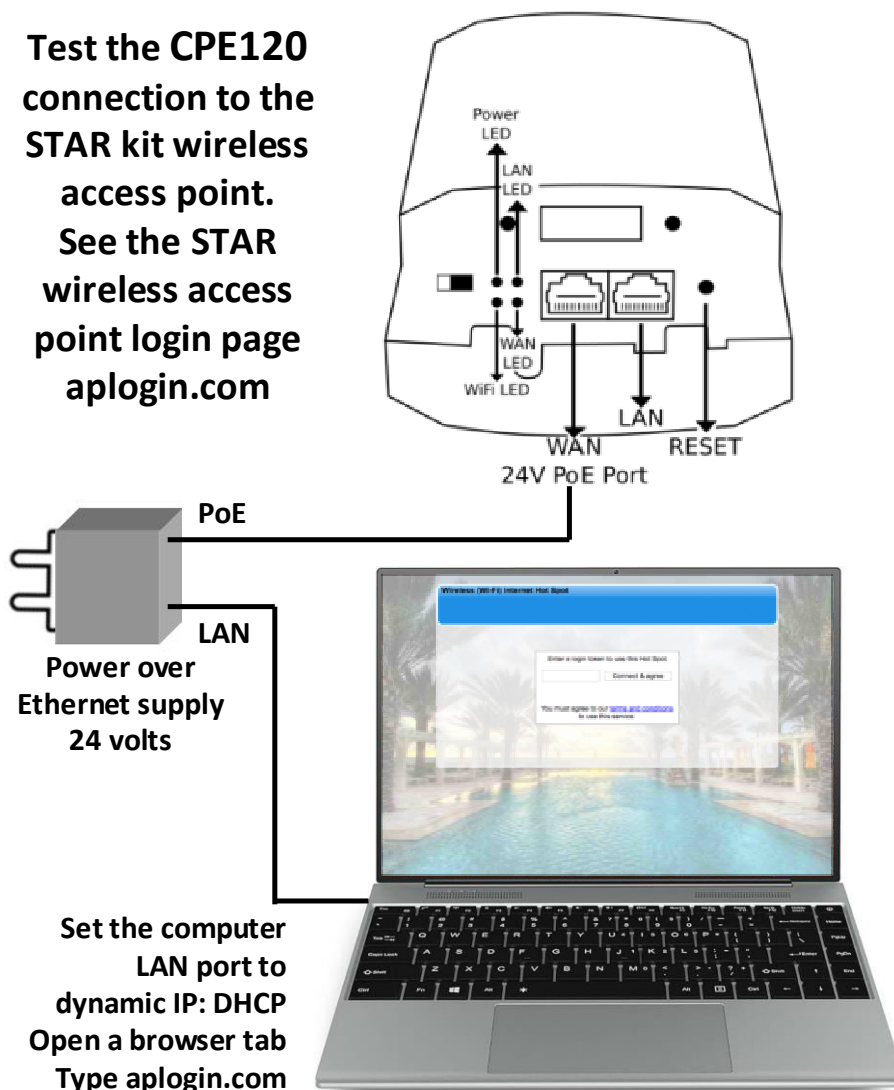


IN7620 Wireless Router Configuration

When the CPE120 wireless receiver has been installed and tested the IN7620 wireless router can be configured and installed. The IN7620 is pre-configured with the following characteristics.

- Wireless name (SSID): **3A773E**
- Wireless WPA key (encryption): **67676767**

To change the configuration of the IN7620, connect the IN7620 product to the power supply and computer as shown in the diagram.

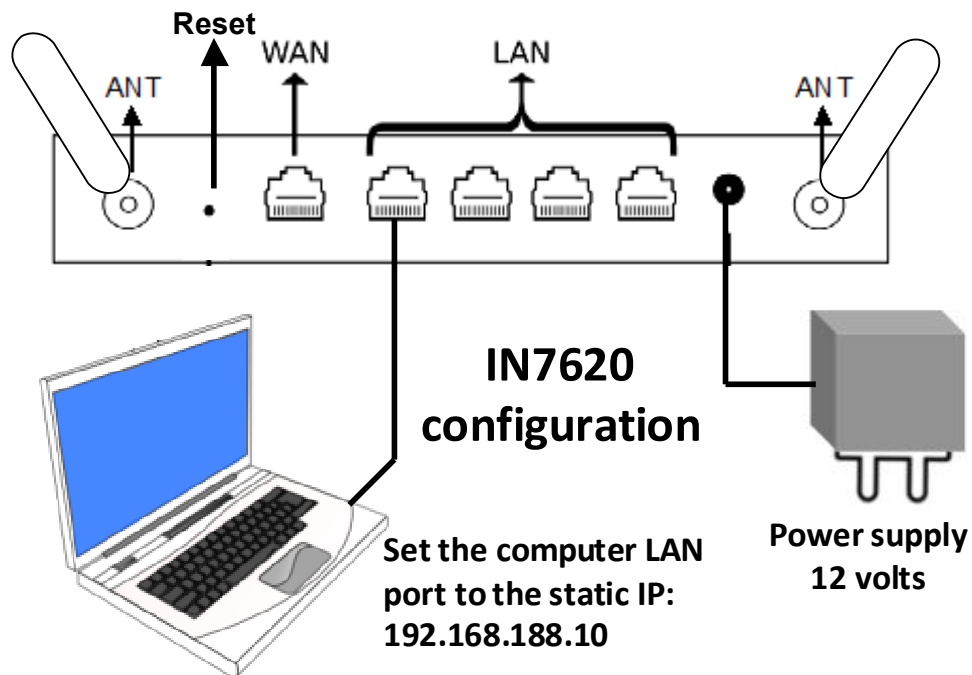

Configure computer for static IP using the instructions provided previously.

- Set Static IP to: 192.168.188.10
- Set Netmask to: 255.255.255.0

Connect the computer LAN port to the IN7620 LAN port


Open a new browser tab on the computer, type the following IP into the browser tab:

- 192.168.188.253


The login box will open, provide the username and password.

- ***username: admin***
- ***password: admin***

Click the login button, shown on the next screen.

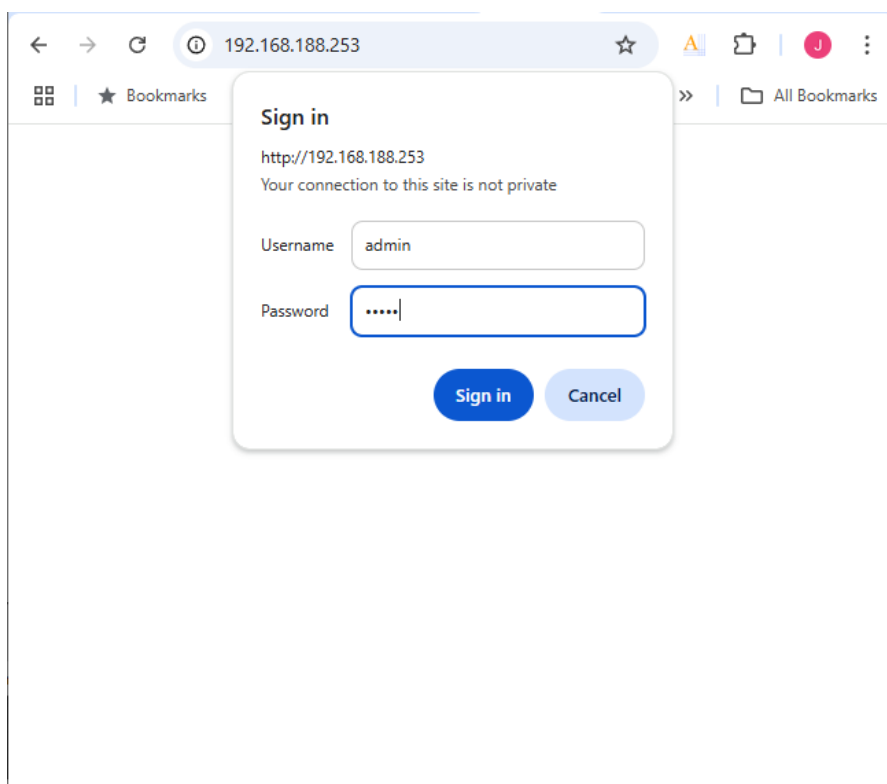


After login the status page is displayed

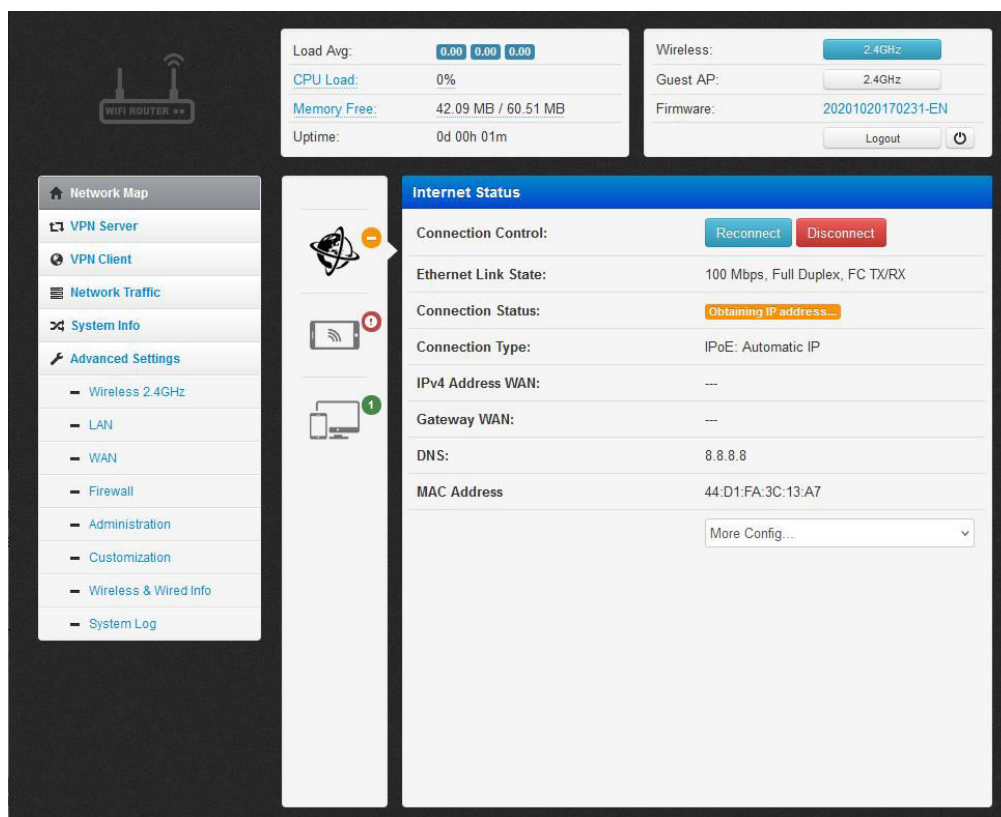

Click the advanced settings – wireless 2.4G menu and click

The wireless name (called **ESSID**) is set to the default of **3A773E**

This can be changed to any other name.
This name will appear when people search for WiFi networks.

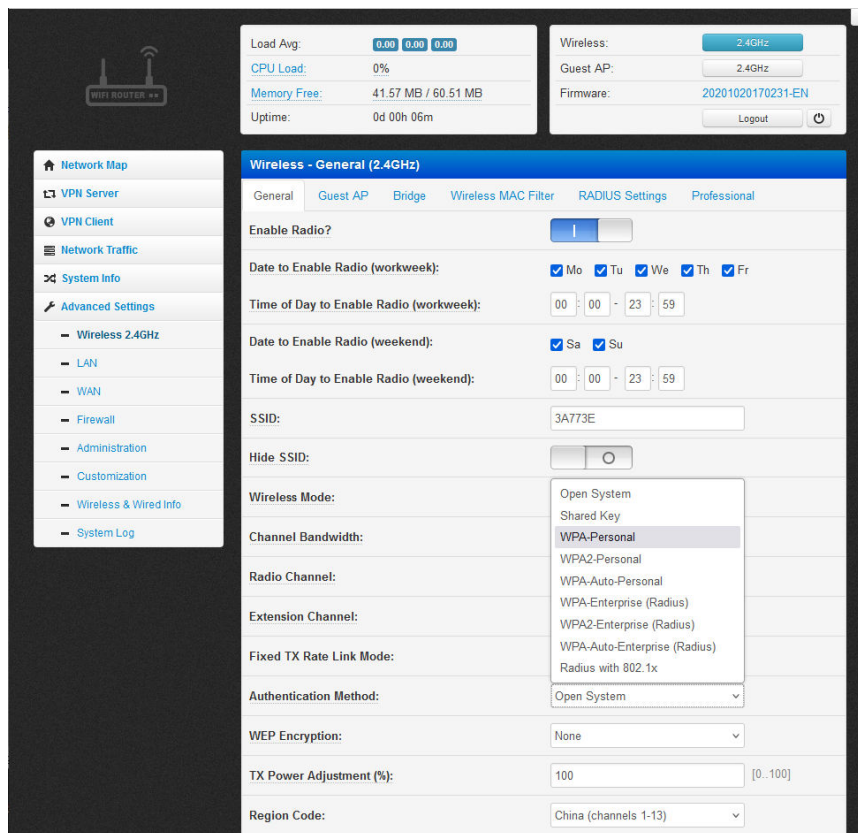

Load Avg: 0.00 0.00 0.00
CPU Load: 0%
Memory Free: 41.57 MB / 60.51 MB
Uptime: 0d 00h 06m

Wireless: 2.4GHz
Guest AP: 2.4GHz
Firmware: 20201020170231-EN
Logout

Wireless - General (2.4GHz)

General Guest AP Bridge Wireless MAC Filter RADIUS Settings Professional

Enable Radio? ☐

Date to Enable Radio (workweek): ☒ Mo ☒ Tu ☒ We ☒ Th ☒ Fr
Time of Day to Enable Radio (workweek): 00 : 00 - 23 : 59


Date to Enable Radio (weekend): ☒ Sa ☒ Su
Time of Day to Enable Radio (weekend): 00 : 00 - 23 : 59

SSID: 3A773E
Hide SSID: ☐

Wireless Mode:
Open System
Shared Key
WPA-Personal
WPA2-Personal
WPA-Auto-Personal
WPA-Enterprise (Radius)
WPA2-Enterprise (Radius)
WPA-Auto-Enterprise (Radius)
Radius with 802.1x

Channel Bandwidth:
Radio Channel:
Extension Channel:
Fixed TX Rate Link Mode:
Authentication Method: Open System
WEP Encryption: None
TX Power Adjustment (%): 100 [0..100]
Region Code: China (channels 1-13)

The default WPA-personal key is **67676767**

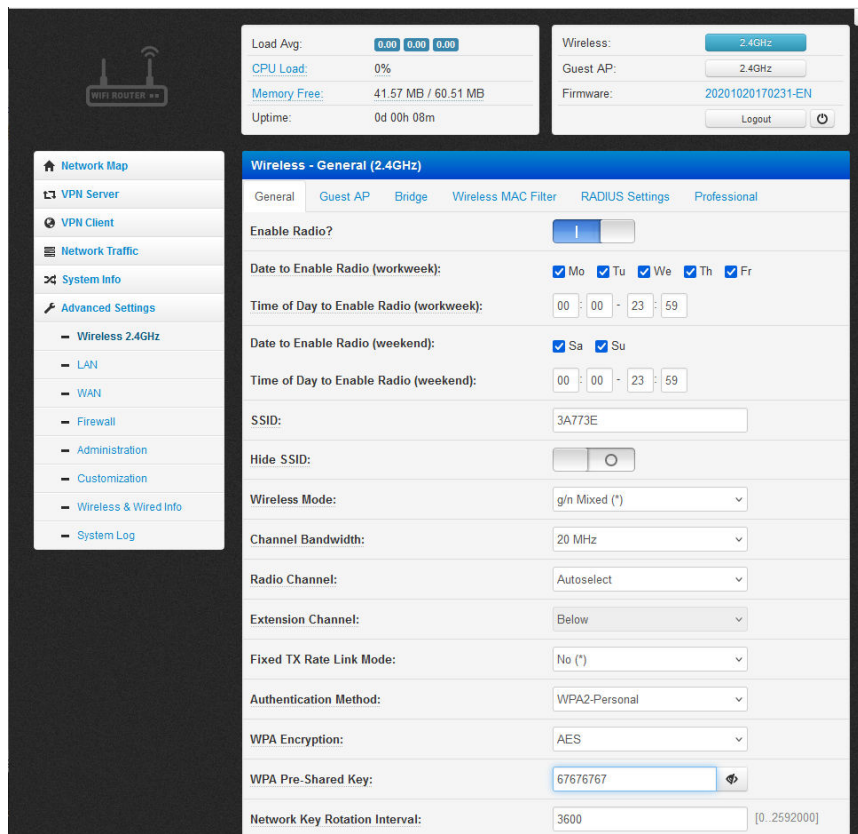

Load Avg: 0.00 0.00 0.00
CPU Load: 0%
Memory Free: 41.57 MB / 60.51 MB
Uptime: 0d 00h 08m

Wireless: 2.4GHz
Guest AP: 2.4GHz
Firmware: 20201020170231-EN
Logout

Wireless - General (2.4GHz)

General Guest AP Bridge Wireless MAC Filter RADIUS Settings Professional

Enable Radio? ☐


Date to Enable Radio (workweek): ☒ Mo ☒ Tu ☒ We ☒ Th ☒ Fr
Time of Day to Enable Radio (workweek): 00 : 00 - 23 : 59

Date to Enable Radio (weekend): ☒ Sa ☒ Su
Time of Day to Enable Radio (weekend): 00 : 00 - 23 : 59

SSID: 3A773E
Hide SSID: ☐

Wireless Mode: g/n Mixed (*)
Channel Bandwidth: 20 MHz
Radio Channel: Autoselect
Extension Channel: Below
Fixed TX Rate Link Mode: No (*)
Authentication Method: WPA2-Personal
WPA Encryption: AES
WPA Pre-Shared Key: 67676767
Network Key Rotation Interval: 3600 [0..2592000]

When a change is made click **apply**.

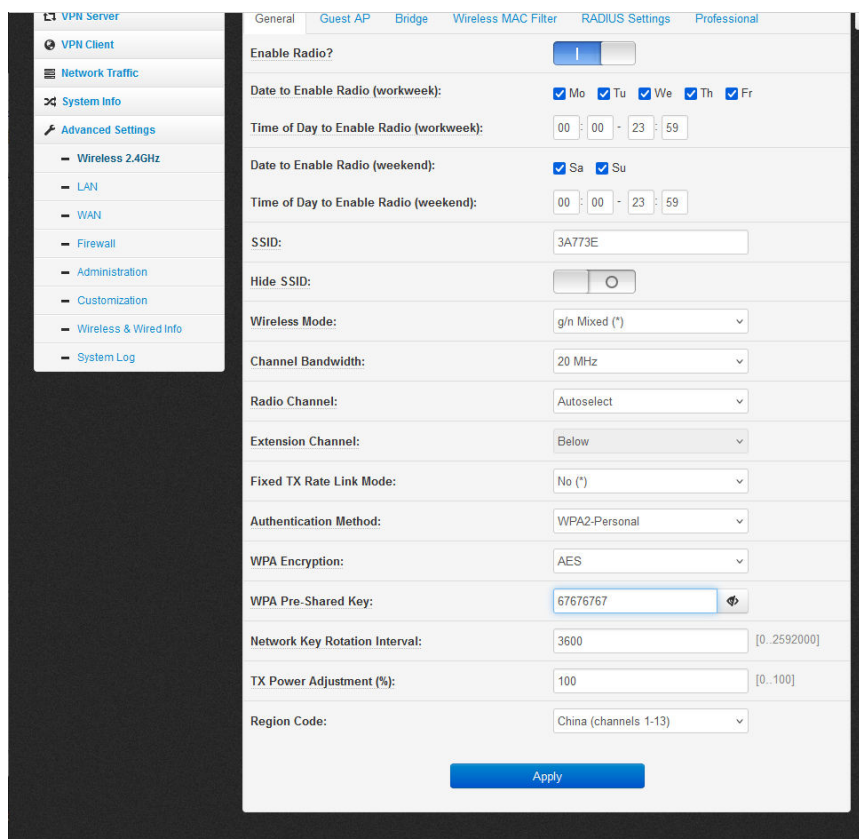

The screenshot shows the 'RADIUS Settings' tab in the configuration interface. The left sidebar contains a menu with options: VPN Server, VPN Client, Network Traffic, System Info, Advanced Settings, Wireless 2.4GHz, LAN, WAN, Firewall, Administration, Customization, Wireless & Wired Info, and System Log. The main content area is titled 'RADIUS Settings' and includes the following fields:

- Enable Radio?**: A toggle switch set to 'On'.
- Date to Enable Radio (workweek):** Checkboxes for Mo, Tu, We, Th, and Fr are all checked.
- Time of Day to Enable Radio (workweek):** Time range 00:00 to 23:59.
- Date to Enable Radio (weekend):** Checkboxes for Sa and Su are both checked.
- Time of Day to Enable Radio (weekend):** Time range 00:00 to 23:59.
- SSID:** Text field containing '3A773E'.
- Hide SSID:** A radio button set to 'Off'.
- Wireless Mode:** Dropdown menu set to 'g/n Mixed (*)'.
- Channel Bandwidth:** Dropdown menu set to '20 MHz'.
- Radio Channel:** Dropdown menu set to 'Autoselect'.
- Extension Channel:** Dropdown menu set to 'Below'.
- Fixed TX Rate Link Mode:** Dropdown menu set to 'No (*)'.
- Authentication Method:** Dropdown menu set to 'WPA2-Personal'.
- WPA Encryption:** Dropdown menu set to 'AES'.
- WPA Pre-Shared Key:** Text field containing '67676767' with a toggle for visibility.
- Network Key Rotation Interval:** Text field containing '3600' with a range indicator [0..2592000].
- TX Power Adjustment (%):** Text field containing '100' with a range indicator [0..100].
- Region Code:** Dropdown menu set to 'China (channels 1-13)'.


An 'Apply' button is located at the bottom right of the configuration area.

The default password is **admin**

Change the password for security.

When a change is made click **apply**.

Configuration of the IN7620 is complete.

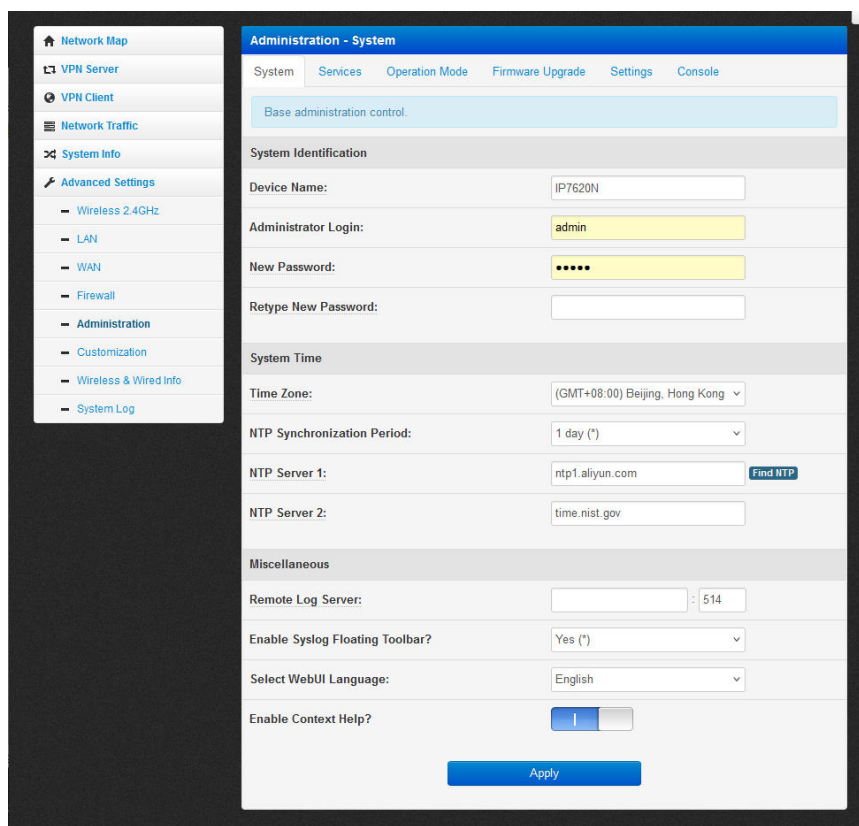

The screenshot shows the 'Administration - System' tab in the configuration interface. The left sidebar is the same as in the previous screenshot. The main content area is titled 'Administration - System' and includes the following fields:

- System Identification**:
 - Device Name:** Text field containing 'IP7620N'.
 - Administrator Login:** Text field containing 'admin'.
 - New Password:** Text field with masked characters '*****'.
 - Retype New Password:** Empty text field.
- System Time**:
 - Time Zone:** Dropdown menu set to '(GMT+08:00) Beijing, Hong Kong'.
 - NTP Synchronization Period:** Dropdown menu set to '1 day (*)'.
 - NTP Server 1:** Text field containing 'ntp1.aliyun.com' with a 'Find NTP' button.
 - NTP Server 2:** Text field containing 'time.nist.gov'.
- Miscellaneous**:
 - Remote Log Server:** Text field with a port number '514'.
 - Enable Syslog Floating Toolbar?** Dropdown menu set to 'Yes (*)'.
 - Select WebUI Language:** Dropdown menu set to 'English'.
 - Enable Context Help?**: A toggle switch set to 'On'.


An 'Apply' button is located at the bottom right of the configuration area.

Proceed to the next section; verify that a device connecting to the IN7620 WiFi can open the login screen of the STAR-1, 2, 6, 7 or 8-kit controller.

Test the WiFi network connection of the STAR-4 kit


Connect the equipment as shown in the figure. Connect the computer or mobile device to the IN7620 WiFi signal, name (SSID): **2A773E** and key: **67676767**.

The CPE120 should already be configured to communicate with the Guest Internet STAR kit. Now open a computer browser then open a new browser tab. Type the name of the Guest Internet controller: **aplogin.com** then the login page should open. If the login page does not open then go back a few steps to the beginning. Test the CPE120 connection to the STAR kit antenna, and then proceed to repeat the test with the IN7620 connected to the CPE120.

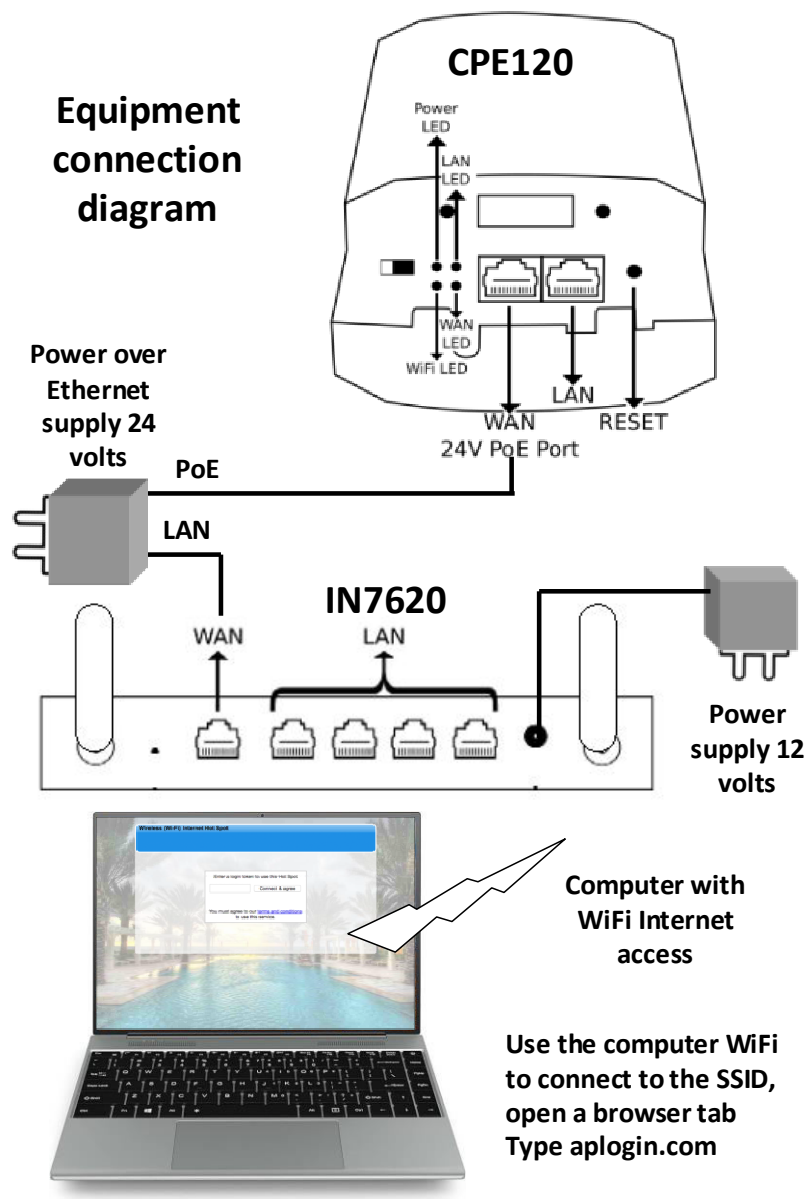


Test the Internet access using an access code generated using the Guest Internet controller.

With the computer or mobile device connected to the WiFi of the IN7620, open a browser to see the login page, an example of a login page is shown in the next figure.

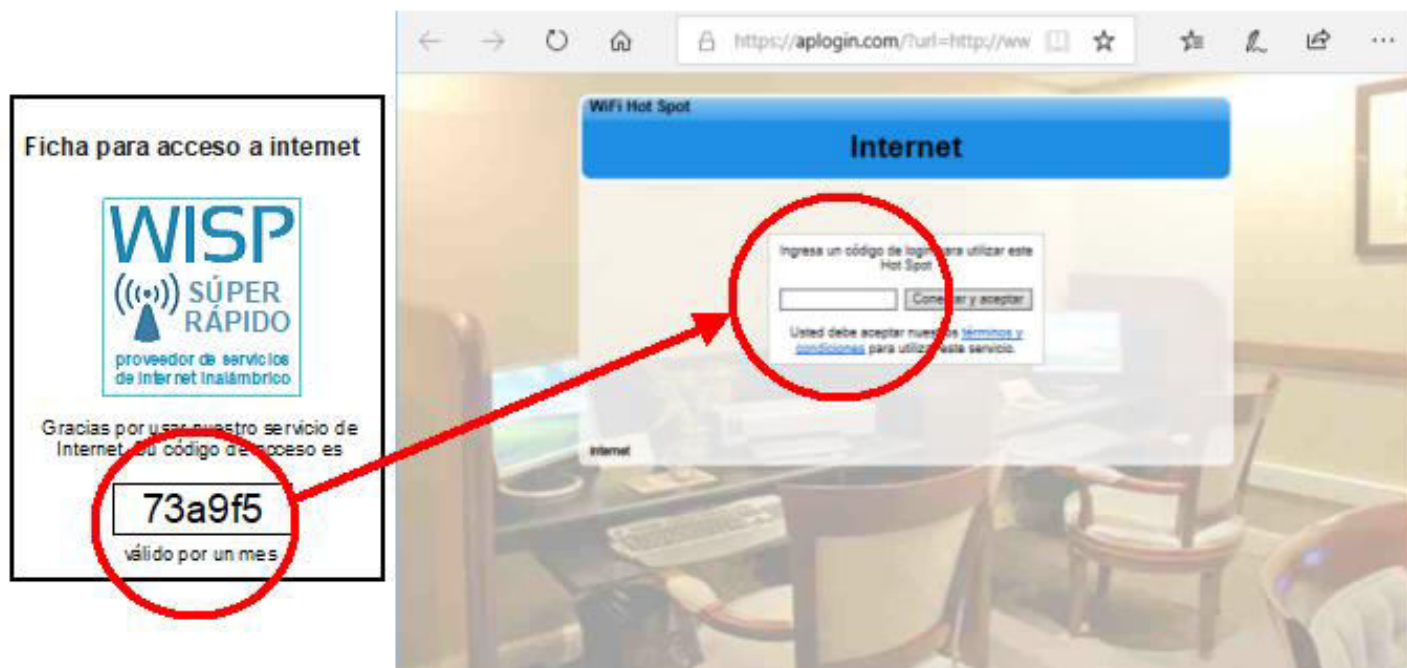

The code on the voucher is typed into the login page then the button is clicked. If the code is valid then the computer will have access to the Internet.


If the login page opens but the code is not accepted then test that the access is available at the STAR-1, 2, 6, 8 or 8 kit as shown in the next figure.

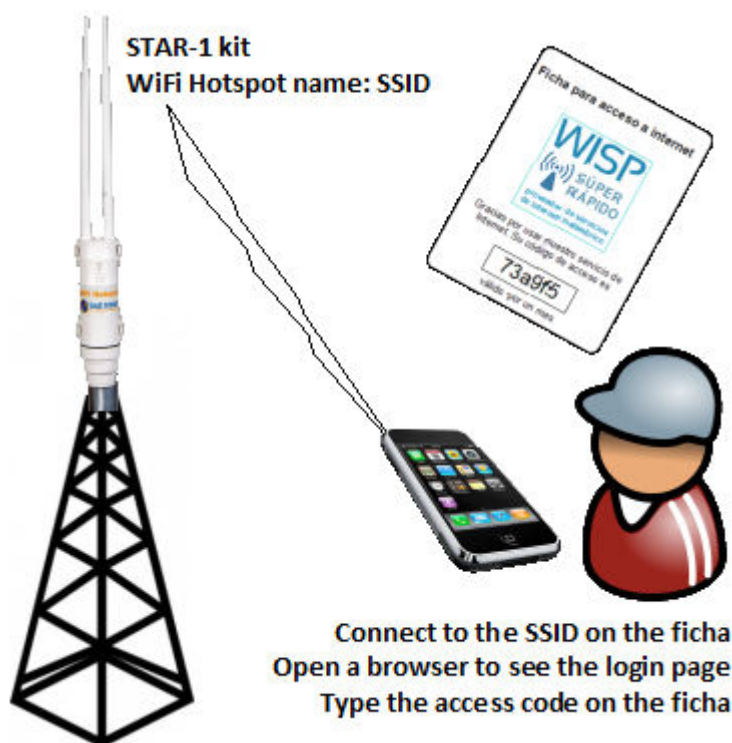

Add the second home to WiFi network configuration with a second STAR-4 kit

When the first home has been installed and is providing Internet access proceed to install the second home using a second STAR-4 kit. The procedure is identical to the first home.

Provide each home with an access code printed onto a voucher. The procedure for printing vouchers with access codes is included with the STAR-1, 2, 6, 7 and 8 kit information.

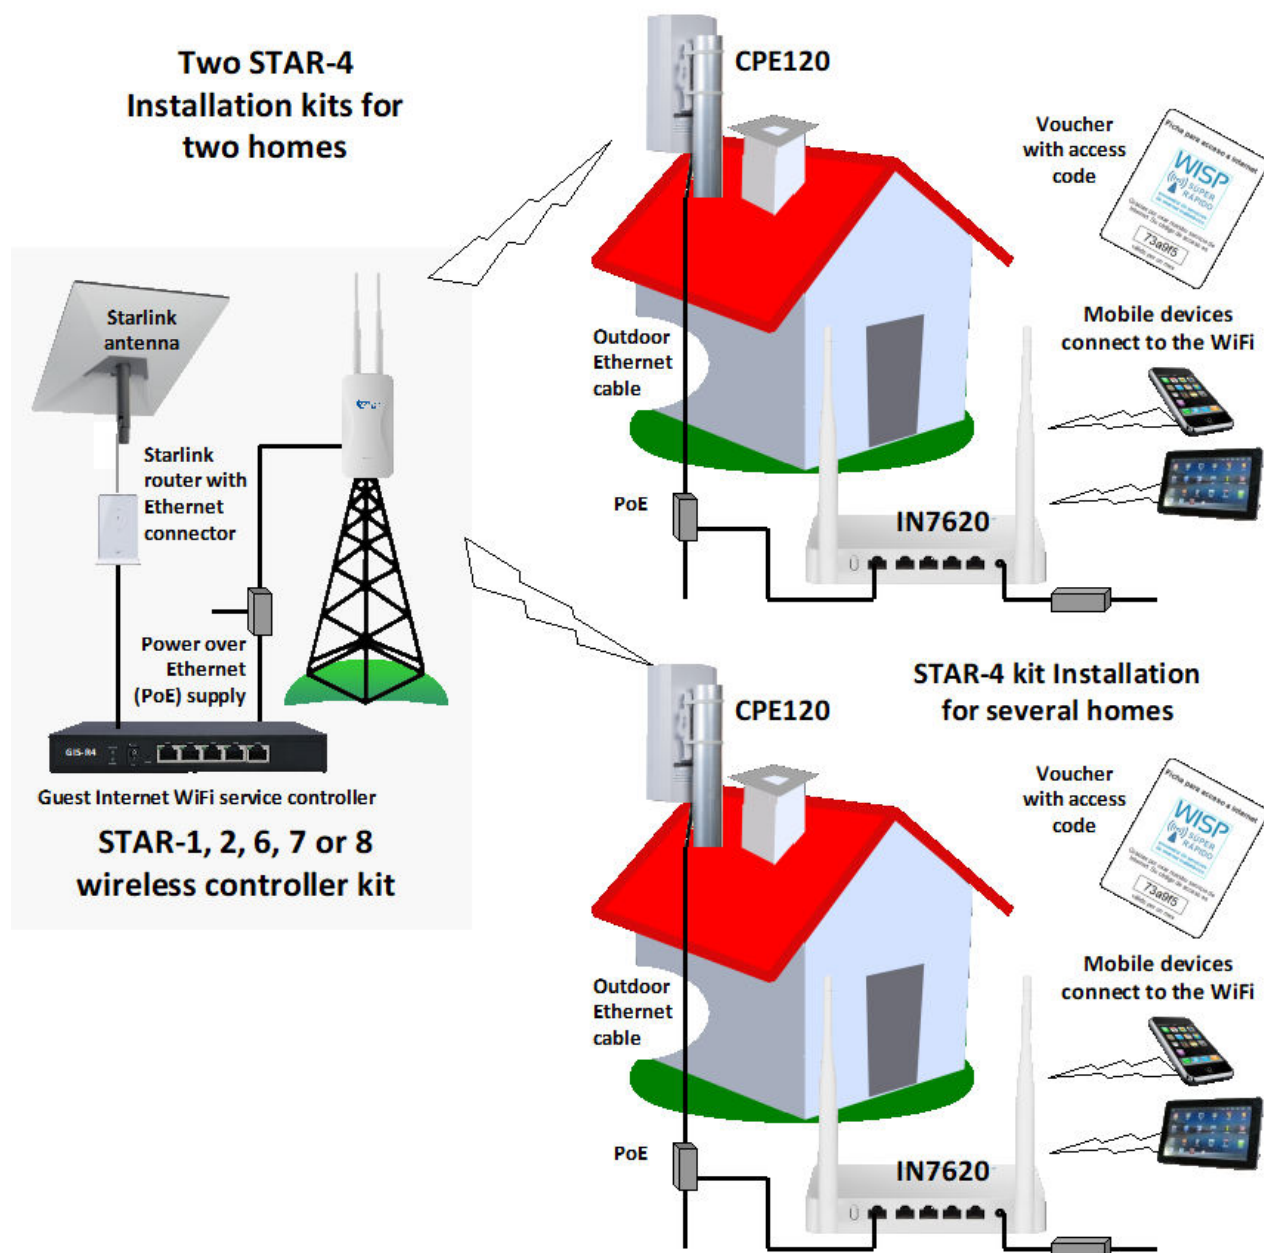

Expand your network by adding more homes

After successfully installing the first home and connecting it to a STAR access point kit, proceed to install more homes. Each STAR-4 kit has the equipment to install two homes. There is a limit to the number of homes that is determined by the STAR kit wireless access point capacity, the bandwidth of the Starlink antenna, and the maximum data speed allocated to each home. The STAR kit capacity is as follows

- STAR-1: no limit but 30 homes is suggested maximum
- STAR-2: no limit but 50 homes is suggested maximum
- STAR-6: no limit but 75 homes is suggested maximum
- STAR-7: no limit but 150 homes is suggested maximum
- STAR-8: no limit but 150 homes is suggested maximum

Calculate the bandwidth or maximum data speed by dividing the maximum speed of the Starlink antenna by the number of homes. The Starlink antenna provides 200Mb/s so for 50 homes:

- $200 / 50 = 4\text{Mb/s}$ maximum speed limit set for each home access code

The diagram shows 4 homes connecting to a STAR kit wireless access point.

